





Classical appearance and modern tubing-connection technology give the Zehnder Forma design radiator its unique identity. The horizontal tubes are placed over the vertical ones. The cross-connection of tubes gracefully highlights the merits of Zehnder Forma and livens up its appearance.

Thanks to the high thermal output rate, Zehnder Forma will warm you during inclement weather. Zehnder Forma radiators may be water-filled or electric.

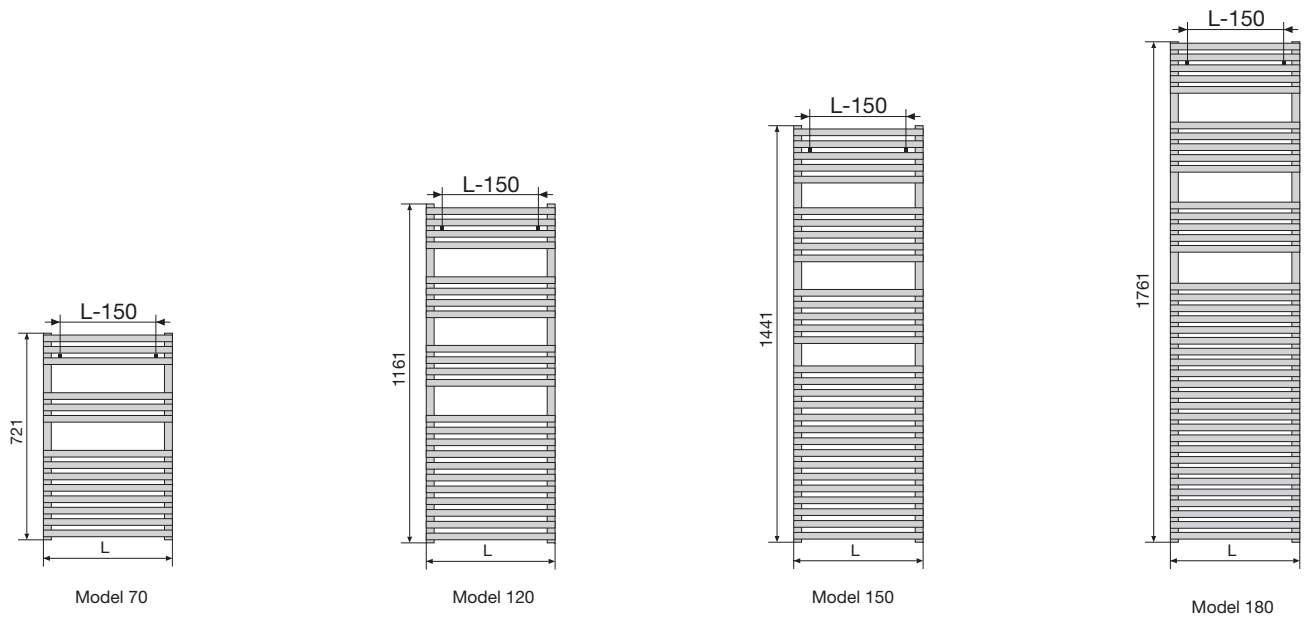

Material: Steel  
 Operating pressure: up to 4 bar  
 Connection: From below, G 1/2"  
 Coating: Enamel (Colours shown in Zehnder catalogue)

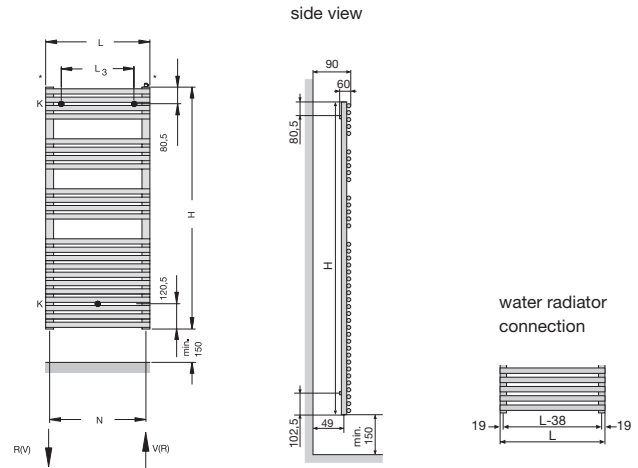

Models for closed heating systems:


Model	Overall height (mm)	Overall length (mm)	Heat capacity (W)	
			$\Delta T=50K$	$\Delta T=60K$
LF-070-050	721	496	378	476
LF-070-060	721	596	442	556
LF-120-050	1161	496	612	770
LF-120-060	1161	596	707	889
LF-150-060	1441	596	927	1166
LF-180-050	1761	496	973	1224
LF-180-060	1761	596	1133	1425
LF-180-075	1761	746	1416	1781

Electric models (electric heater DBM)


Model	Overall height (mm)	Overall length (mm)	Immersion Electric rating (W)
<b>White and coloured</b>			
LFE-070-050-DD	841	496	300
LFE-090-050-DD	1041	496	500
LFE-120-050-DD	1281	496	750
LFE-170-050-DD	1801	496	1000



Material: Steel  
 Operating pressure: up to 4 bar  
 Connection: From below, G 1/2"  
 Coating: Chrome-plated  
 (not all sizes)

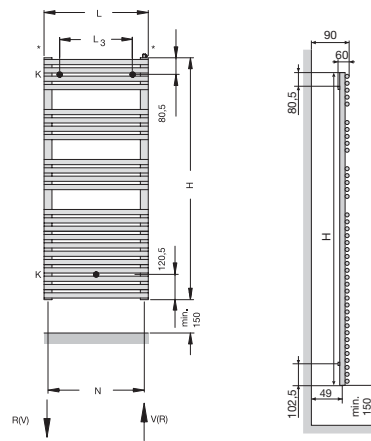

water radiator connection



Chrome plated models for closed heating systems:


Model	Overall height (mm)	Overall depth (mm)	Heat capacity (W)	
			$\Delta T=50K$	$\Delta T=60K$
LFC-070-050	721	496	276	296
LFC-120-050	1161	496	447	480
LFC-120-060	1161	596	516	554
LFC-150-050	1441	496	581	624
LFC-180-050	1761	496	710	763
LFC-180-060	1761	596	827	888

Chrome plated electric models (electric heater DBM)

Model	Overall height (mm)	Overall depth (mm)	Immersion Electric rating (W)
<b>White and coloured</b>			
LFEC-090-050-DD	1041	496	300
LFEC-120-050-DD	1281	496	500
LFEC-170-050-DD	1801	496	750


## zehnder forma double layer

Material: Steel  
 Operating pressure: up to 4 bar  
 Connection: From below, G 1/2"  
 Coating: Enamel (Colours shown in Zehnder catalogue),  
 Chrome-plated (not all sizes)

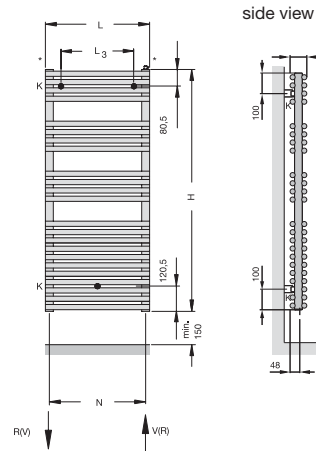

side view

water radiator connection



Models for closed heating systems:

Model	Overall height (mm)	Overall length (mm)	Heat capacity (W)		Maximum immersion Electric rating required (W)
			$\Delta T=50K$	$\Delta T=60K$	
LFD-120-050	1161	496	855	1075	750
LFD-120-060	1161	596	1017	1276	900
LFD-150-050	1441	496	1065	1339	900
LFD-150-060	1441	596	1266	1588	1200
LFD-180-050	1761	496	1298	1635	1200
LFD-180-060	1761	596	1543	1941	1200



Zehnder Group  
Export Division  
Information Office  
Almweg 34  
D-77933 Lahr  
Tel. +49 (0) 7821 586 392  
Fax +49 (0) 7821 586 406  
zehnderexport@zehndergroup.com  
www.zehnder.eu



Zehnder Group  
Export Division  
Information Office  
7, rue Jean Mermoz  
F-91031 Evry Cedex  
Tél 33 1 69 36 16 15  
Fax 33 1 69 36 15 33  
export@zehndergroup.com  
www.zehnder.eu

**zehnder**