

zehnder *toga*

zehnder




Good looking, elegant in their simplicity, and extremely practical, these radiators can not only warm your bathroom but can also turn it into a cozy corner of your home.


Zehnder Toga radiators are comprised of horizontal and D-profiled vertical tubes. The strong and imperceptible joining of tubes is accomplished by laser welding.

Toga radiators are supplied ready for installation, complete with original mounting brackets, and may be installed on the wall as well as used as a partition.


Toga radiators may be water-filled or electric.




Model 70




Model 120

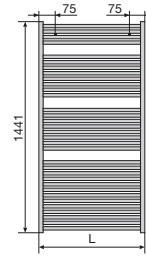

Model 150

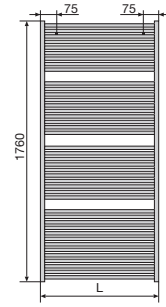

Model 180

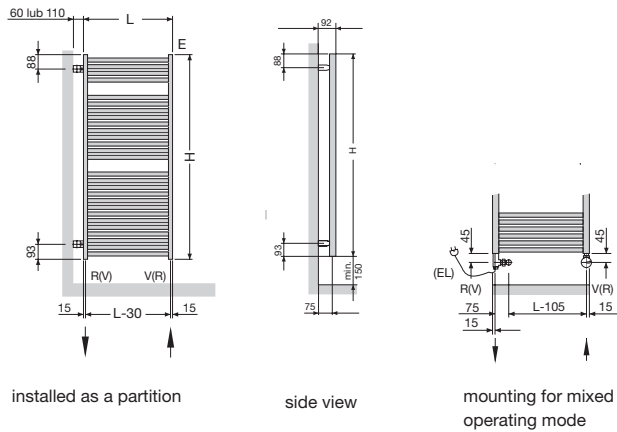

installed as a partition

side view

mounting for mixed operating mode



Material: Steel

Operating pressure: up to 11.5 bar

Connection: From below, G 1/2"


Coating: Enamel (Colours shown in Zehnder catalogue)

Models for closed heating systems:


Model	Overall height mm	Overall length mm	Heat capacity (W)	
			$\Delta T=50K$	$\Delta T=60K$
TG-070-045	716	450	326	410
TG-070-050	716	500	359	452
TG-070-060	716	600	424	533
TG-120-045	1148	450	513	645
TG-120-050	1148	500	565	711
TG-120-060	1148	600	668	840
TG-120-075	1148	750	824	1037
TG-150-050	1441	500	701	882
TG-150-060	1441	600	836	1052
TG-180-045	1760	450	780	981
TG-180-050	1760	500	862	1084
TG-180-060	1760	600	1028	1293
TG-180-075	1760	750	1276	1605
TG-180-100	1760	1000	1690	2126

Electric models (electric heater DBM)


model	Overall height mm	Overall length mm	Immersion Electric rating
			(W)
TE-070-050-DD	843	500	300
TE-120-050-DD	1275	500	600
TE-150-050-DD	1563	500	750
TE-180-050-DD	1887	500	900
TE-180-060-DD	1887	600	1200




Model 70




Model 120




Model 150




Model 180

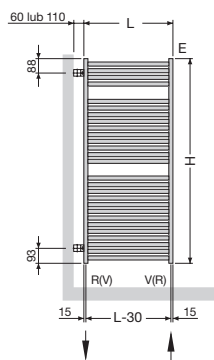

installed as a partition



side view



mounting for mixed operating mode



Material: Steel

Operating pressure: up to 11.5 bar

Connection: From below, G 1/2"

Coating: Chrome-plated (not all sizes)

Zehnder Toga Chrome models for closed heating systems:

Model	Overall height mm	Overall length mm	Heat capacity (W)	
			$\Delta T=50K$	$\Delta T=60K$
TGC-070-050	716	500	269	338
TGC-070-060	716	600	297	373
TGC-120-045	1148	450	513	645
TGC-120-050	1148	500	396	498
TGC-120-060	1148	600	468	589
TGC-150-050	1436	500	491	618
TGC-180-050	1760	500	560	704
TGC-180-060	1760	600	668	840

Zehnder Toga Chrome electric models (electric heater DBM)

model	Overall height mm	Overall length mm	Immersion Electric rating (W)
TEC-070-050-DD	843	500	200
TEC-120-050-DD	1275	500	300
TEC-150-050-DD	1563	500	500
TEC-180-060-DD	1887	600	750



Zehnder Group
Export Division
Information Office
Almweg 34
D-77933 Lahr
Tel. +49 (0) 7821 586 392
Fax +49 (0) 7821 586 406
zehnderexport@zehndergroup.com
www.zehnder.eu



Zehnder Group
Export Division
Information Office
7, rue Jean Mermoz
F-91031 Evry Cedex
Tél 33 1 69 36 16 15
Fax 33 1 69 36 15 33
export@zehndergroup.com
www.zehnder.eu

zehnder